


Eigen StoneTac™ Series

Eigen's StoneTac TGSI Series are made from natural granite, nature's hardest building material. StoneTac comes in two series, Integrated and Modulized (VersaTac).

Integrated StoneTac is available in two colours, White - PandaTac™ and Charcoal - RavenTac™. A range of sizes is also available for different designs including circular TGSI pads.


Modulized StoneTac is also trademarked as VersaTac®. It composes of hard wearing Granite TGSI inserts epoxied onto a base tile. Base tiles could be customised to match the surrounding pavements, including Granite, Marble, Sandstone, Slate, Blue Stone etc.

These Granite TGSIs, with either an Exfoliated or Sand Blasted finish on the Granite inserts, provides an alternative choice for architects and landscape designers who work in challenging situations where compromise in aesthetic for practicality is not an option.

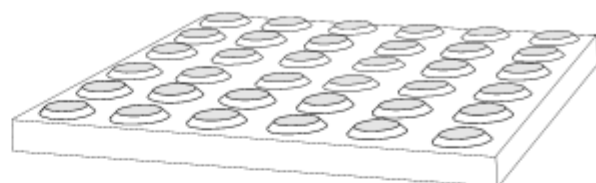

Integrated Granite TGSI

Eigen PandaTac™ / RavenTac™

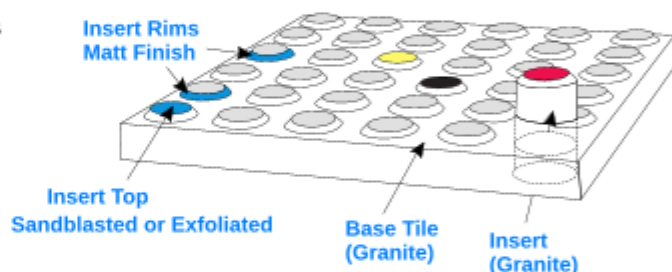

Modulized Granite TGSI

Eigen VersaTac®

Testings (Performed by CSIRO)

AS/NZS 4586 Appendix A
Wet Pendulum 4S

W

AS/NZS 4586 Appendix D
Oil Wet Ramp Test

R13

AS/NZS 1428.4
Wet & Dry Luminance Reflectance

Dependent on Choice of Granite

Colour Selection

Integrated TGSI

White (PandaTac™)

Charcoal (RavenTac™)

Modulized TGSI (VersaTac®)

White TGSI on Charcoal Paver

Charcoal TGSI on White Paver

Please refer to colour system at
<http://www.eigentactile.com/>

Dimensions

Top of Dome 25mm

Base of Dome 35mm

Height of Dome 5mm

Tile Dimensions: **Tile Thickness:**

300 x 300 mm

20-40mm

400 x 400 mm

300 x 600 mm

Manufactured to AS/NZS 1428.4:2009

Lay Eigen StoneTac TGSI as you would normally with any other paver units. Thickness of the StoneTac tile can be made to match existing paver units. Leave a 2-3mm gap between tiles for grouting.

Please visit <http://www.eigentactile.com/> for detailed installation guide.